



DIAMOND  
COATINGS



## Diamond Diamox+ Coating Datasheet

### DIAMOX+ (INDEX MATCHED ITO)


The **DIAMOX+** coating is a multi-layer coating of quartz and metal oxides. The thickness of the quartz is carefully controlled to suppress unwanted reflection and enhance the transmission.

ITO is applied directly to the raw material substrate to the desired thickness or resistance value required. The additional index matching coating is then calculated and applied directly on top of the ITO with designated contact areas.

Detailed below are a few examples of Standard **DIAMOX** compared to **DIAMOX +** coatings.



Typical performance of Diamox ITO  
10 Ohms/square Substrate: glass

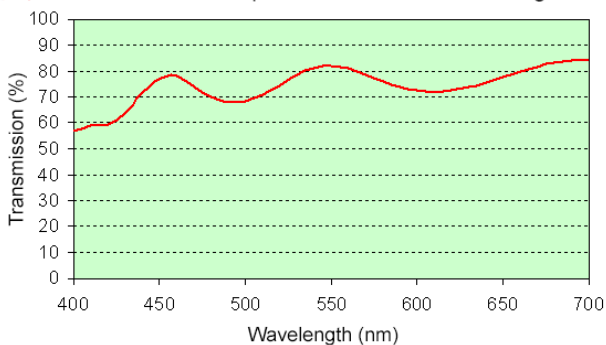


© Diamond Coatings Ltd 2007

www.diamondcoatings.co.uk



Typical performance of Diamox+ index matched ITO  
10 Ohms/square Substrate: glass

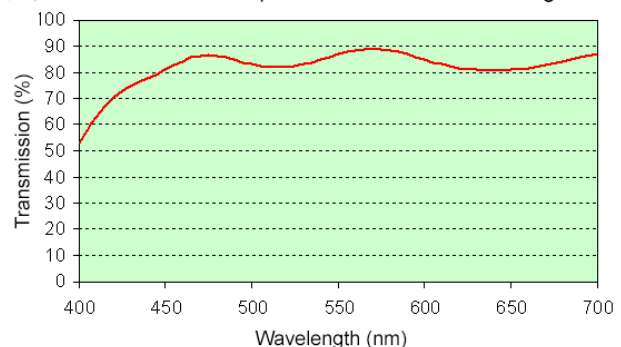

© Diamond Coatings Ltd 2007

www.diamondcoatings.co.uk

#### DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate,  
Shelah Road,  
Halesowen, West Midlands, B63 3PG  
Tel: +44 (0) 121 550 9430  
Email: [enquiries@diamondcoatings.co.uk](mailto:enquiries@diamondcoatings.co.uk)  
Web: [www.diamondcoatings.co.uk](http://www.diamondcoatings.co.uk)

#### DIAMOND COATINGS INC.

4830 S. 36th Street,  
Phoenix, Arizona,  
85040  
Tel: +1 (480) 999 3456  
Email: [sales@diamondcoatings.com](mailto:sales@diamondcoatings.com)  
Web: [www.diamondcoatings.com](http://www.diamondcoatings.com)




DIAMOND  
COATINGS



## Diamond Diamox+ Coating Datasheet



Typical performance of Diamox ITO  
20 Ohms/square Substrate: glass

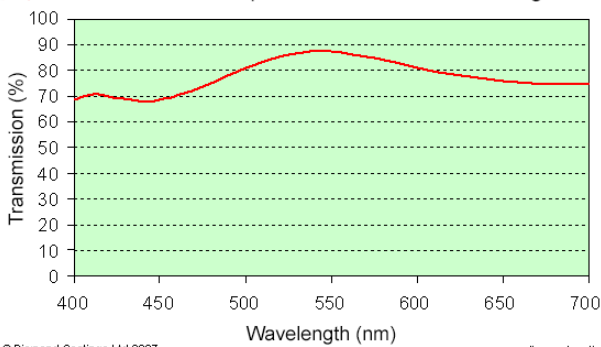


© Diamond Coatings Ltd 2007

www.diamondcoatings.co.uk



Typical performance of Diamox+ index matched ITO  
20 Ohms/square Substrate: glass

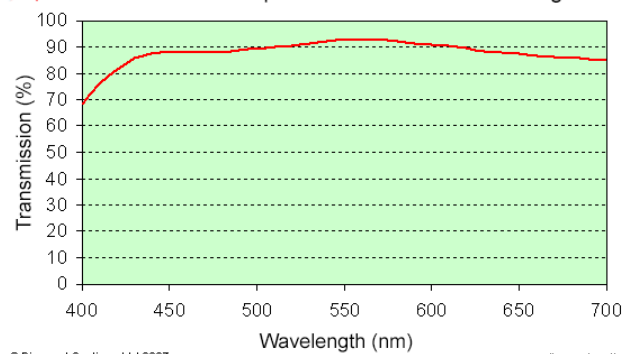

© Diamond Coatings Ltd 2007

www.diamondcoatings.co.uk

Other typical transmission peaks between the range of 525nm & 600nm on various substrates are listed below.

	Resistance Value	DIAMOX (std. ITO)	Diamox+ (Index Matched ITO)
Glass	50 Ohms/sq	89%	93%
Polycarbonate	20 Ohms/sq	82%	90%
Polycarbonate	50 Ohms/sq	85%	90.5%
H/C Acrylic	10 Ohms/sq	79%	85%
H/C Acrylic	50 Ohms/sq	85%	92%

### DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate,  
Shelah Road,  
Halesowen, West Midlands, B63 3PG  
Tel: +44 (0) 121 550 9430  
Email: enquiries@diamondcoatings.co.uk  
Web: www.diamondcoatings.co.uk

### DIAMOND COATINGS INC.

4830 S. 36th Street,  
Phoenix, Arizona,  
85040  
Tel: +1 (480) 999 3456  
Email: sales@diamondcoatings.com  
Web: www.diamondcoatings.com